

Aquia® IV 1G® Close Coupled Toilet, 1.0 & 0.8 GPF

FEATURES

- DynaMax™ Tornado Flush® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CeFiONtect® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Elongated front bowl and tank set, less toilet seat
- Chrome push-button
- 12" Rough-in

MODELS

- **CST446CUMG (#01)**
With CeFiONtect ceramic glaze

COMPONENTS

- **CT446CUG**
Elongated bowl with CeFiONtect
- **ST446UM**
Tank and cover only

Optional Components

- **SS124**
SoftClose Seat
- **SS234**
SoftClose Seat
- **TSU08W.10**
10" Unifit Rough-In
- **TSU08W.14**
14" Unifit Rough-In
- **9AU321-A**
WASHLET® adapter
(Required for WASHLET installation)

COLORS/FINISHES

- #01 Cotton



1G One Gallon

DM DynaMax Tornado Flush

CF CeFiONtect

SD Skirted Design

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DynaMax Tornado Flush toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall be coated with CeFiONtect, elongated front bowl, high profile tank, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model CST446CUMG_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



CST446CUMG


Aquia® IV 1G® Close Coupled Toilet, 1.0 & 0.8 GPF

SPECIFICATIONS

| | |
|----------------------------|---|
| Water Use | 1.0 & 0.8 GPF (3.8 & 3.0 LPF) |
| Flush System | DynaMax™ Tornado Flush® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 5-5/8" x 4-1/8" |
| Trap Diameter | 2-1/2" |
| Rough-in | 12" (10" & 14" Optional) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CT446CU(G) 85 lbs |
| | ST446UM 29 lbs |
| Shipping Dimensions | CT446CU(G) 30-3/4" L x 17-3/8" W x 20-1/2" H |
| | ST446UM 17-1/4" L x 7-7/8" W x 17-1/2" H |

INSTALLATION NOTES


Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

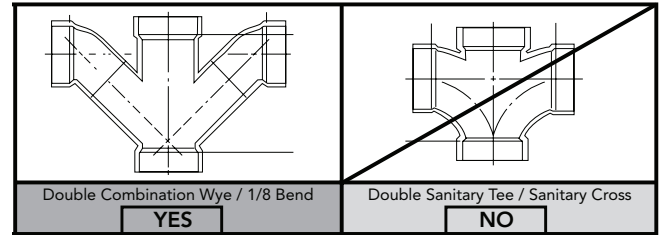

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

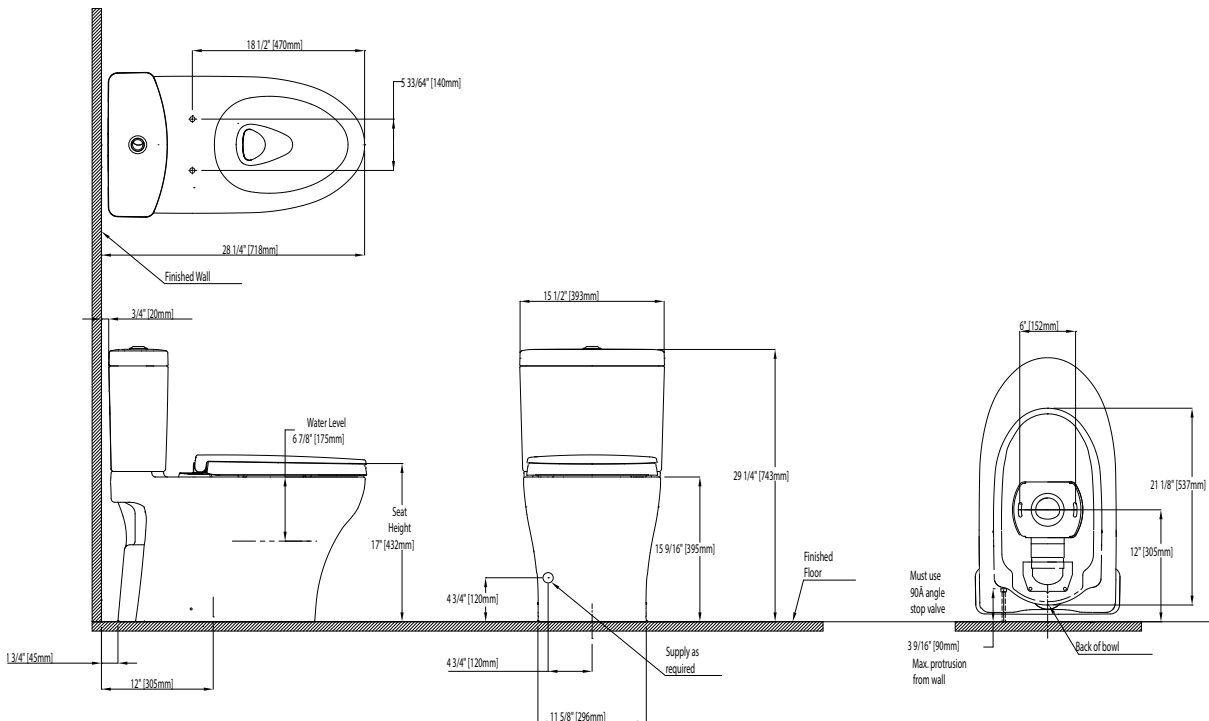

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01319 v.02