


Lloyd® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

FEATURES

- WaterSense certified low-flow 1.5 gpm faucet
- Lever handles
- Solid brass construction
- Ceramic disk valve cartridge
- Accommodates 8"-16" spread
- Metal pop-up drain assembly included

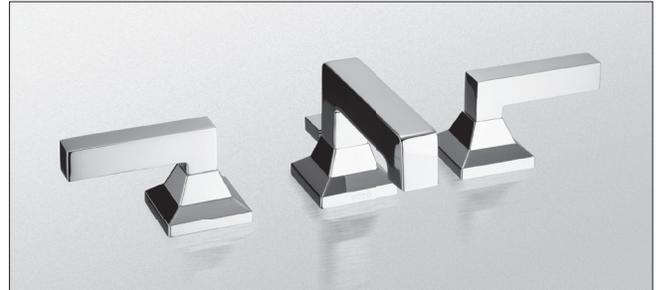

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO (cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB1953, Vermont S.152 & Maryland HB. 372
- ADA compliant
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION



The widespread lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have lever handles. Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall accommodate 8"-16" spread. Product shall include metal pop-up drain assembly. Product shall be compliant with California AB1953 & Vermont S.152. Product shall be TOTO Model TL930DDLQ_____.

TL930DDLQ

Lloyd® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

SPECIFICATIONS

- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Brass
- Shipping Weight: 8.6 lbs.
- Shipping Dimensions: 14-1/4" L x 12-1/4" W x 2-3/4" H
- Maximum Flow Rate: 1.5 gpm (5.7 lpm)

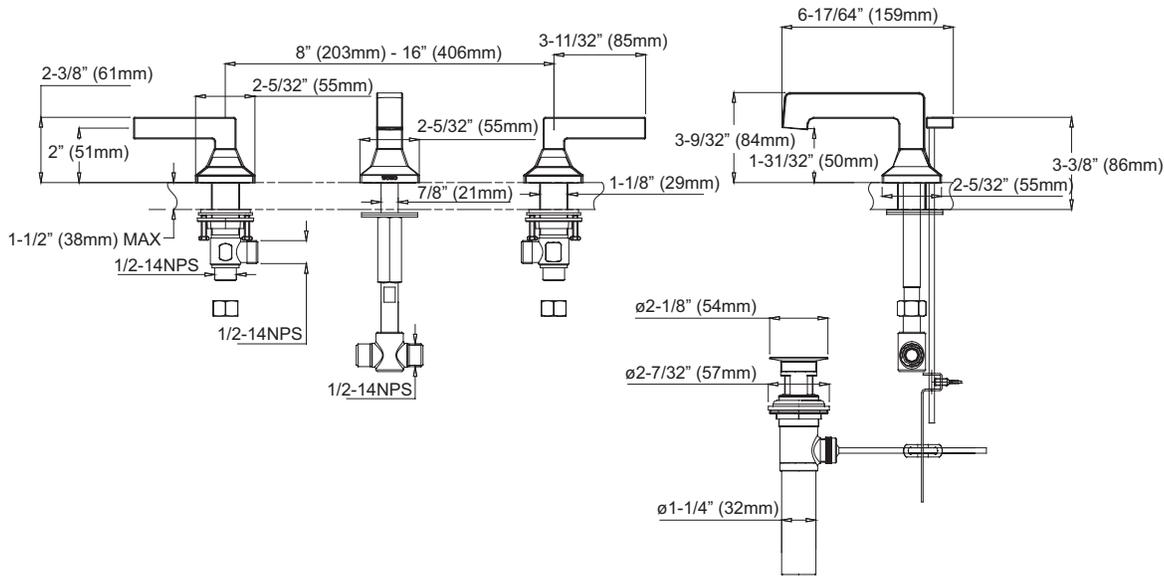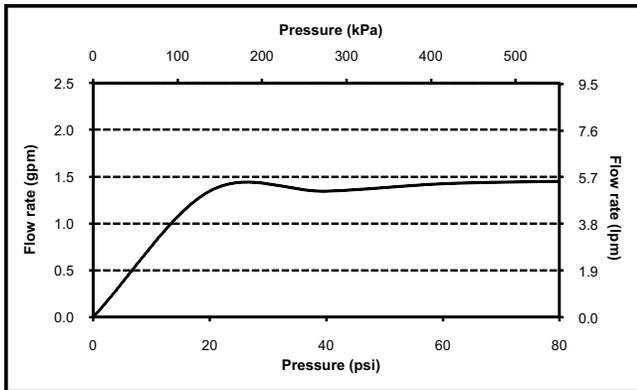

TOTO®

These dimensions and specifications are subject to change without notice